

THE EAGLE CYCLONE E-VAC PUMP

The **Cyclone E-Vac Pump System** represents a true advancement in down-hole pump technology. Sand, grit, iron sulfide, and other fines which normally contaminate the produced oil and water can now quickly pass through the pump assembly. No longer are residual concentrations of these particulates allowed to collect between barrel and plunger.

Clearance between conventional pump plungers and barrels permit some fluid bypass, or slippage between these surfaces. Within this void space, sand, formation fines, and other particulates can accumulate. During the normal up-and-down motions of the plunger, these accumulations cause rapid wear, usually in the form of vertical scoring, to both the plunger and barrel surfaces. Moreover, frictional forces generated by these accumulations cause excessive stresses to be generated throughout the pump and rod-string which often result in a stuck pump, automatic shut-down of the pumping unit, or a parted rod string.

Repairs necessitated by the above forms of damage, plus revenues lost during resulting downtime, cost the oil and gas industry tens of millions of dollars each year. By incorporating the **Cyclone E-Vac** within the pump assembly, stuck plungers and premature wear of barrel and plunger surfaces can be eliminated. Costly well servicing and pump replacements can be reduced to a minimum.


How is this possible? During the down-stroke the **Cyclone E-Vac**, along with the Cyclone Seat Plug forces any entrained particulates collected within the space between barrel and plunger inward through the axial evacuation ports and into the center of the plunger. Here, they commingle with other fluids entering the pump and are displaced into the tubing. Throughout the up-stroke particulates are also collected within the tapered neck of the **Cyclone E-Vac**, where, during the down-stroke, they are flushed upward and enter the tubing through the Cyclone section of the E-Vac.

Simultaneously with the above, the axial ported technology, incorporated within the **Cyclone E-Vac**, causes the fluid/particulates to constantly rotate. This rotation permits the pump barrel and plunger to wear more evenly, resulting in longer pump life and a more cost efficient pump assembly. While the pump is not operational, settling solids are redirected into the ID area of the plunger, reducing the possibility of stuck plungers and excessive barrel wear. This is done using the radial ported vane technology featured on the **Cyclone E-Vac**. For best results, the complete **Cyclone E-Vac Pump System** is recommended.

***Eagle's Cyclone E-Vac is NOT a barrel plunger. The Cyclone Adaptor is a solids remediation tool, only to be used in conjunction with a standard API plunger design.**

BENEFITS INCLUDE:

- REDUCED STUCK PLUNGERS
- BETTER PUMP EFFICIENCY
- REDUCED BARREL WEAR
- REDUCED PLUNGER WEAR
- UNIFORM WEAR OF PLUNGER
- UNIFORM WEAR OF BARREL
- REDUCED DOWN TIME
- EXTENDED PUMP RUNS
- REDUCED COST OF OPERATION

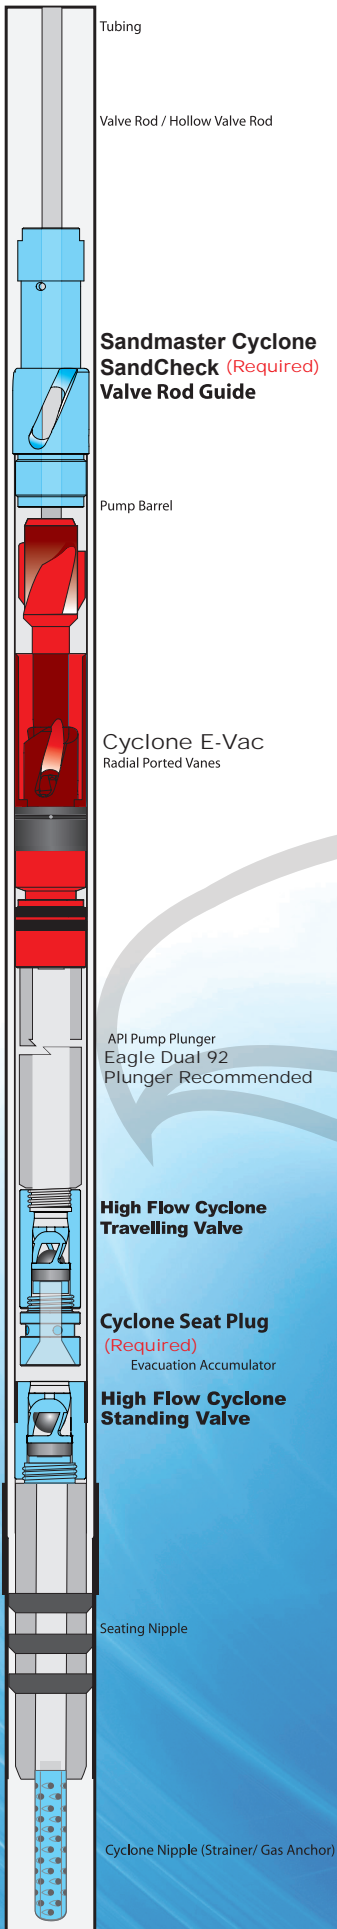

THE EAGLE CYCLONE E-VAC PUMP SYSTEM

UP STROKE:


Throughout the up-stroke particulates such as sand, silt, and iron sulfide residing above the plunger are swept inward and away from the inside surface of the barrel and are redirected into the chamber of the E-Vac. The Cyclone E-Vac patented taper technology hydraulically forces residual particulates inwardly to the ID of the plunger. This feature virtually eliminates stuck plungers and excessive barrel damage.

DOWN STROKE:

During the down-stroke, these same particulates which were collected in the E-Vac's chamber are flushed away and enter the produced well stream. In turn, particulates entering the barrel/plunger void from below the plunger are pulled inward through the radially located evacuation vanes and are also flushed from the pump by the produced well stream. In each situation, residual build-up of damaging fines between barrel and plunger are eliminated, greatly prolonging the run-times of barrel and plunger surfaces.

STOPPED:

While the pump is not operational, particulates such as sand and iron sulfide will settle/concentrate. The Cyclone's patented E-Vac chamber along with the radial ported vane design redirects the solids inward into the plunger ID. This keeps the solids concentration from wedging between the plunger OD and the pump barrel, eliminating additional damage and/or stuck plungers.

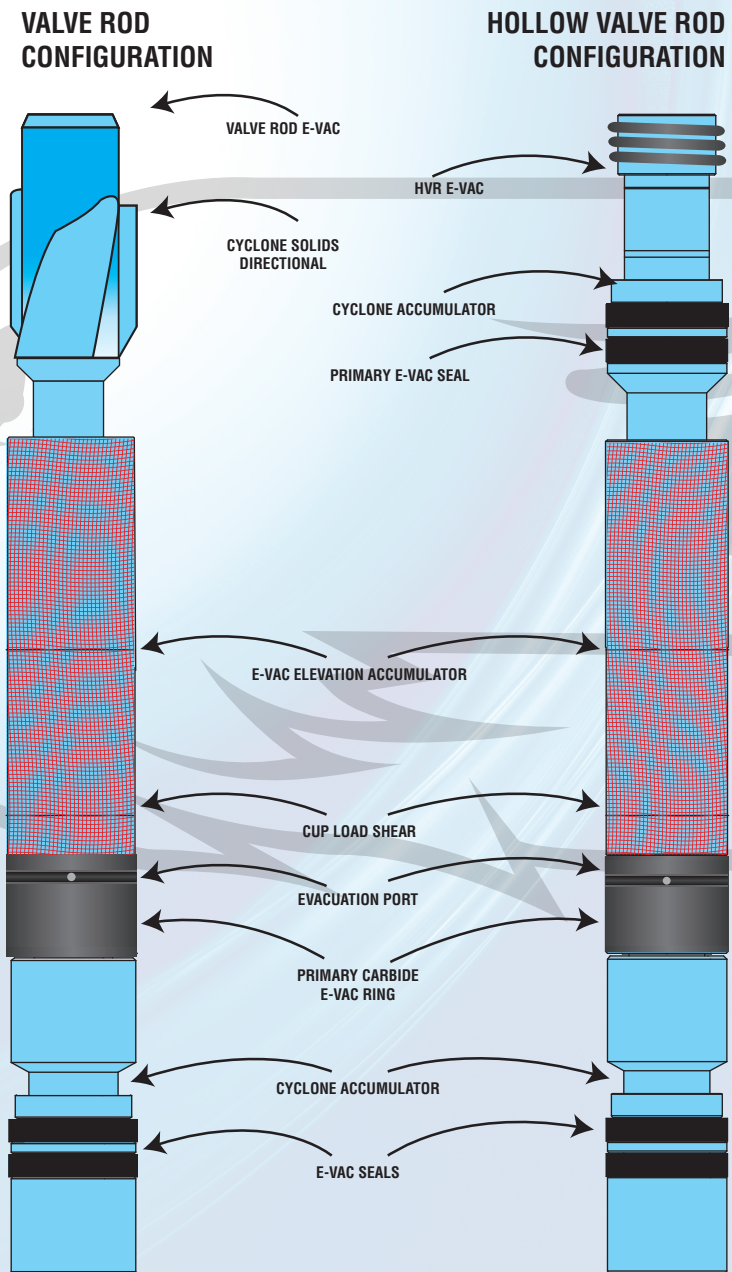

Material Construction:
17-4 Stainless Steel
High Density Fiber
Carbide

US and Canada Patents
World Wide Patents Pending




175 West 900 South #7
St. George, UT 84770

Ph: 435-656-0505
Fax: 435-628-9069


www.eagleinnovations.net

ITEM	DESCRIPTION
1	CAGE, TOP OPEN
2	BALL & SEAT
3	PLUNGER, PIN-END
4	CAGE, CLOSED PLUNGER
5	PULLER, STANDING VALVE
6	COUPLING, TUBING EUE 8R
7	NIPPLE, LIFT
8	COUPLING BARREL
9	BARREL, HEAVY WALL
10	NIPPLE SEATING 2-CUP
11	CAGE, STANDING VALVE
12	NIPPLE EXTENSION
13	BODY, HOLD-DOWN 2-CUP
14	CUP, SEATING
15	SPACER
16	LOCKNUT
17	COUPLING
18	CAGE, OPEN PLUNGER
19	PLUNGER
20	COUPLING, PULL TUBE
21	TUBE, PULL
22	CONNECTOR, BARREL
23	COUPLING EXTENSION
24	BARREL
25	PLUG
26	MANDREL
27	BUSHING, VALVE ROD
28	ROD VALVE
29	PLUG SEAT
30	CYCLONE SANDCHECK GUIDE
31	CAGE CLOSED BARREL
32	VALVE ROD CONNECTION
33	CYCLONE E-VAC ADAPTER
34	CYCLONE SEAT PLUG
35	CYCLONE TPA-MALE SANDCHECK
36	CYCLONE E-VAC 6" COUPLER ACCUMULATOR
37	CYCLONE E-VAC 3" COUPLER ACCUMULATOR

Insert Pump

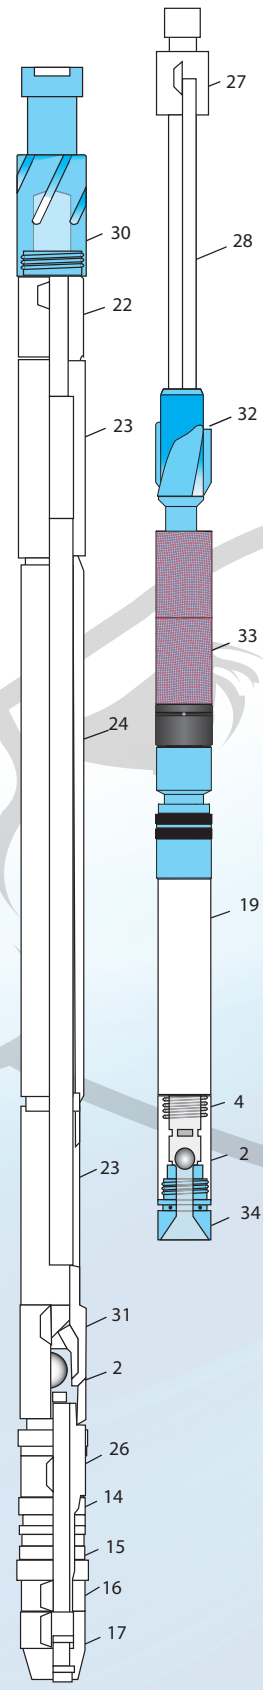

Traveling Barrel Pump

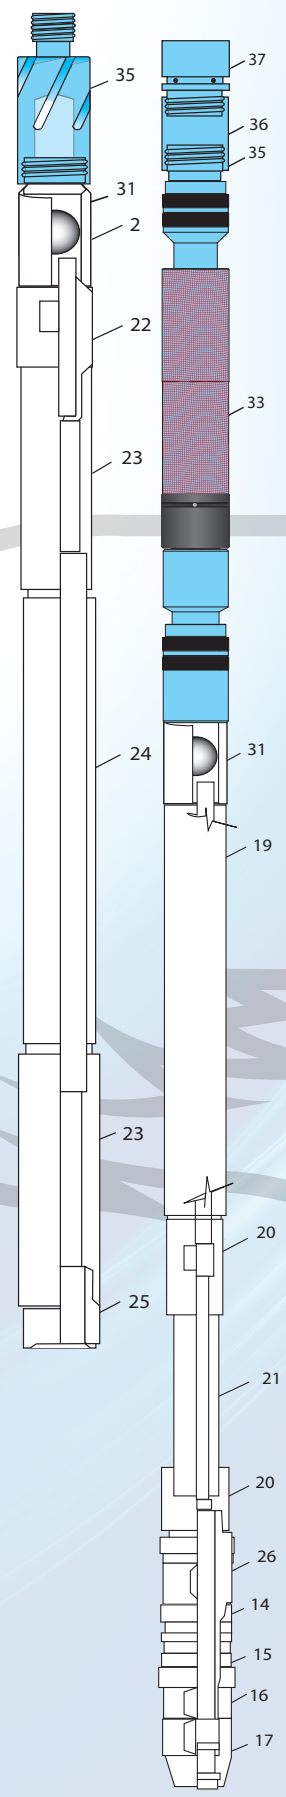

Tubing Pump

